

CUBE67 BUS NODES


Profibus DP

PROFIBUS DP

Connection cables are in the online shop under "Connection Technology". Housing fully potted.


[Link til artikel](#)

Billede

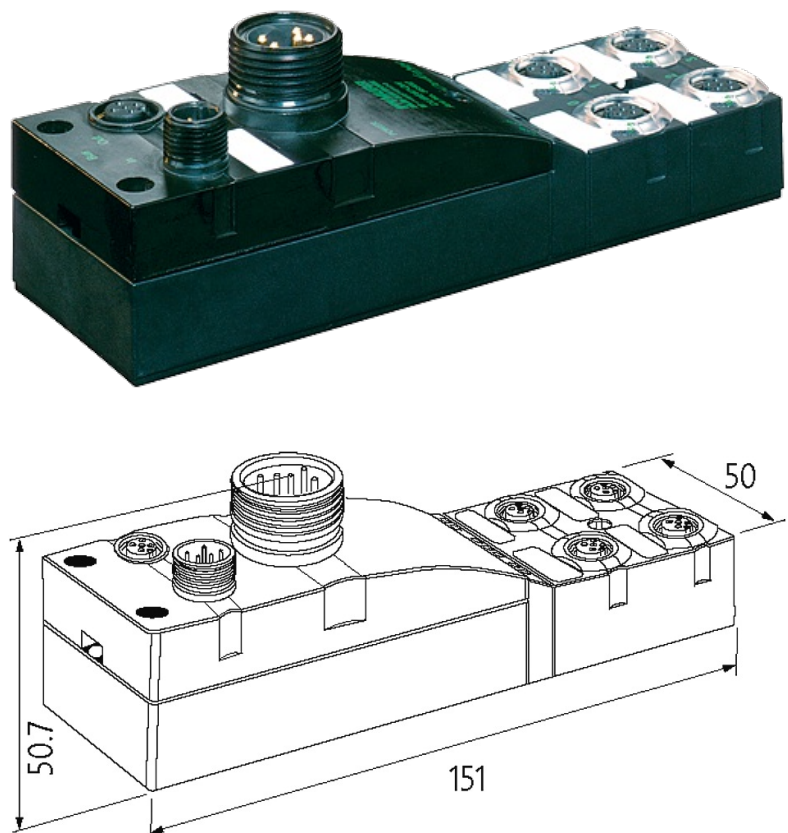

Produktet kan afvige fra billedet

Godkendelser



Mere information



PROFIBUS

Addressing Rotary switch 0...99

Connections

Fieldbus PROFIBUS 12 Mbit/s; M12, B-coded

Sensor-system/actuator supply 7/8", 5-pole, 2 × max. 8 A

Internal system connection M12, 6 pole; max. 4 A

Module supply

Operating voltage 24 V DC (EN 61131-2)

Current consumption max. 120 mA

General data

Protection IP67

Mounting method 2-hole screw mounting

Temperature range 0...+55 °C (storage temperature -20...+75 °C)

Dimensions H × W × D 151×50×50.3 mm

Cube system

Module capacity max. 16

Diagnostic

Communication status via LED and BUS

Diagnostic via LED per module and channel

Diagnostic via BUS per module and channel

Monitoring - under voltage yes

Monitoring - no voltage yes

Short-circuit and overload yes

Commercial data

country of origin DE

customs tariff number 85389099

EAN 4048879048736

eClass 27242608

Pakke-enhed 1