


GT-2734

Digital Output, 4 Points, MOS Relay (Solid State Relay), 24V (AC/ DC), 2.0A, 10 RTB

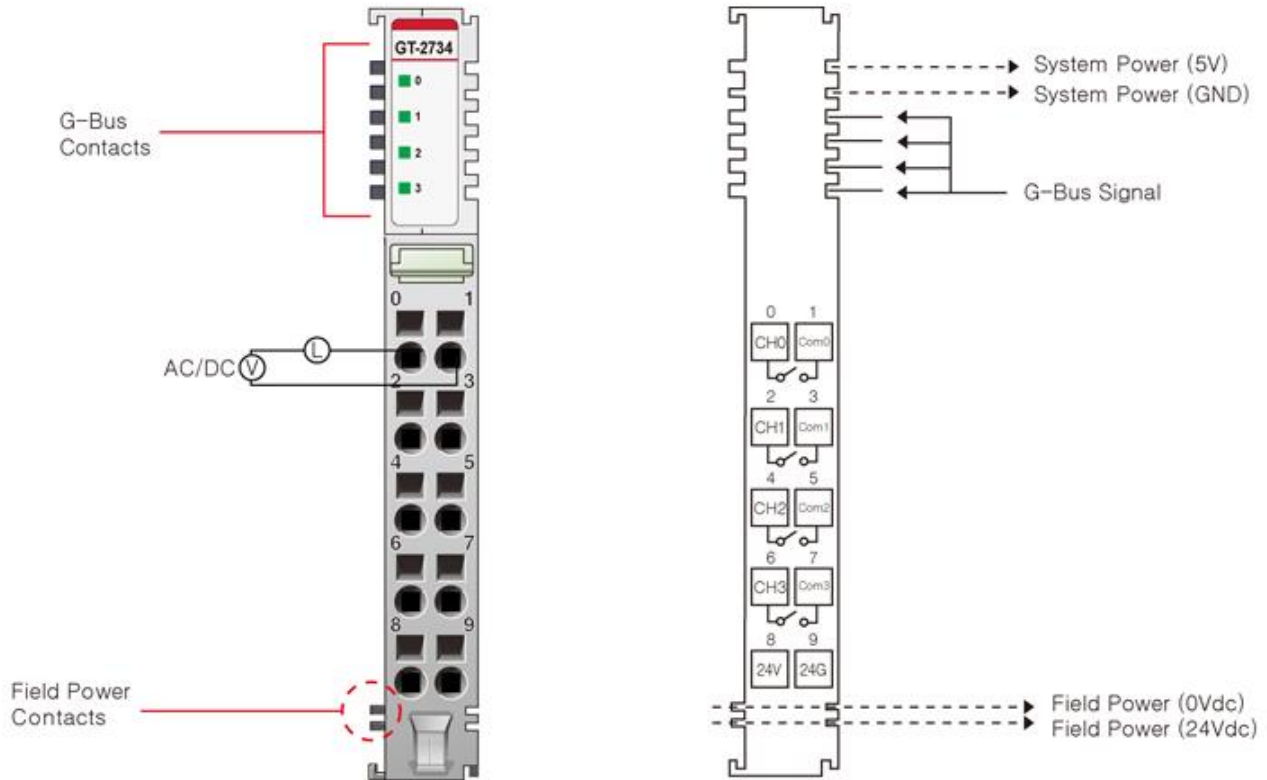

GT-2734 output Specification

Output per module	4 Points, Bi -directional
Indicators (Logic side)	4 Green output state
Relay Type	MOS Relay (Solid State Relay)
Output Voltage Range	
(Load Dependent)	Max. 240Vac @ 0.5A resistive Max. 240Vdc @ 0.5A resistive
Output Delay Time (resistive load)	Max. AC/DC: 240V OFF to ON: Max. 0.6ms ON to OFF: Max. 3ms
Output Current Rating	Max. 0.5A per channel
Frequency range (Vac)	47 ~ 63Hz
Common Type	4Points / 2COM (Single Common)

General Specification

Power Dissipation	80mA @ 5.0Vdc
Isolation	I/O to Logic: Isolation Field Power: Non-isolation
Field Power (ByPass)	Field Power passes through to the next module. Supply Voltage: 24Vdc Voltage Range: 15 ~ 32Vdc (AC Power Not Used)
Wiring	I /O Cable Max. 2.0mm ² (AWG 14)
Weight	58g
Module Size	12mm x 99mm x 70mm
Pin No.	Description
0	Output Channel 0_A
1	Output Channel 0_A
2	Output Channel 1_B
3	Output Channel 1_B
4	Output Channel 2_C
5	Output Channel 2_C
6	Output Channel 3_D
7	Output Channel 3_D
8	Common (Field Power 24V)
9	Common (Field Power 0V)