


## GT-2784

4 Points, Relay Output Terminal, 110Vdc/ac, 1A

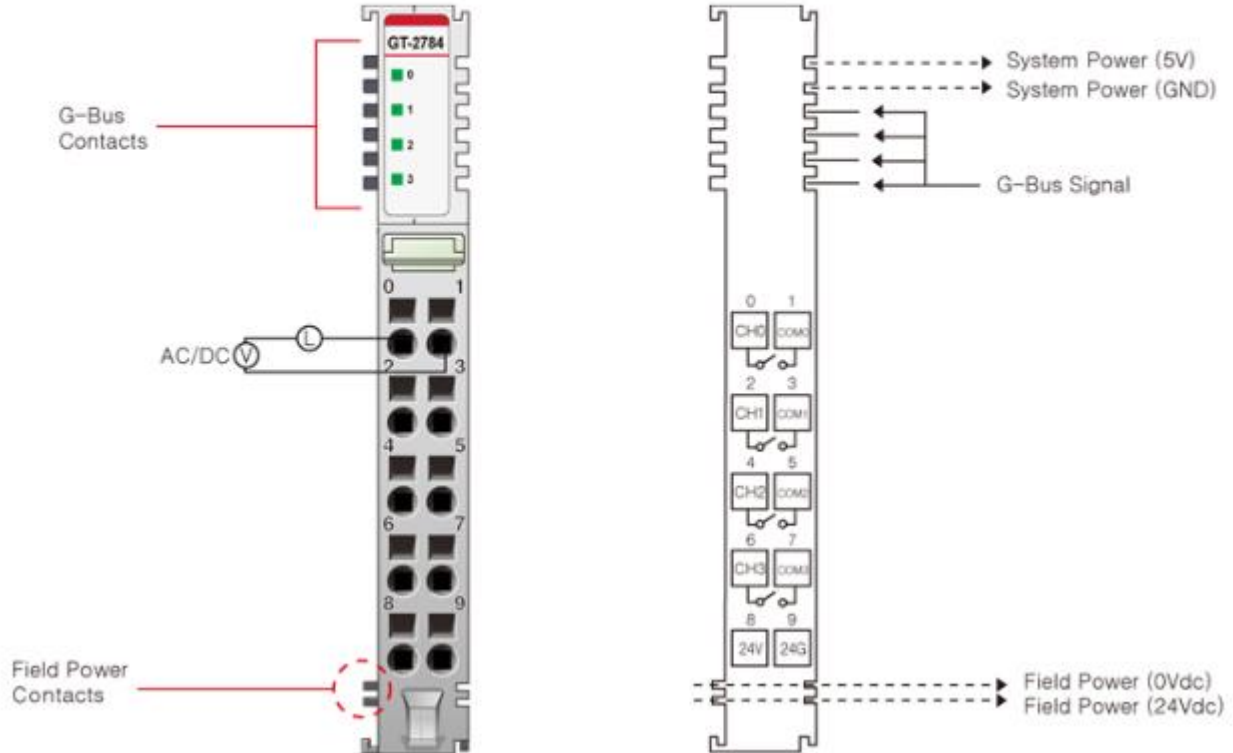

### GT-2784 Output Specification

Output per module	4 Points, Bi-directional
Indicators (Logic side):	4 Green output state
Relay Type:	MOS Relay (Solid State Relay)
Output Voltage Range	Max. 110Vac @ 1A resistive
(Load Dependent):	Max. 110Vdc @ 1A resistive
Output Delay Time	Max. AC/DC: 110V
(resistive load)	OFF to ON: Max. 1 ms @ 110Vdc ON to OFF: Max. 3 ms @ 110Vdc OFF to ON: Max. 1.5 ms @ 110Vac ON to OFF: Max. 3 ms @ 110Vac
Output Current Rating:	Max. 1A per channel
Frequency range (Vac):	47 ~ 63Hz

Common Type: 4Points / 2COM (Single Common)

**General Specification**

Power Dissipation: 80mA @ 5.0Vdc

Isolation: I/O to Logic: Isolation

Field Power: Non-isolation

Field Power (By Pass) Supply voltage: 24Vdc

Voltage range: 15V ~ 32Vdc

(AC Power Not used)

Wiring: I /O Cable Max. 2.0mm<sup>2</sup> (AWG 14)

Weight: 58g

Module Size: 12mm x 99mm x 70mm

Pin No.	Description
0	Output Channel 0
1	COM 0
2	Output Channel 1
3	COM 1
4	Output Channel 2
5	COM 2
6	Output Channel 3
7	COM 3
8	Field Power 24V
9	Field Power 0V